
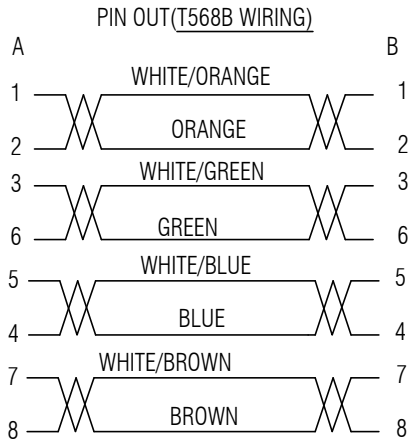
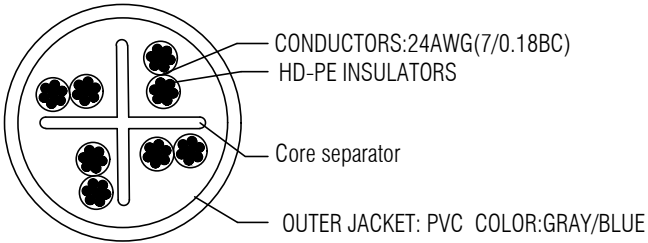


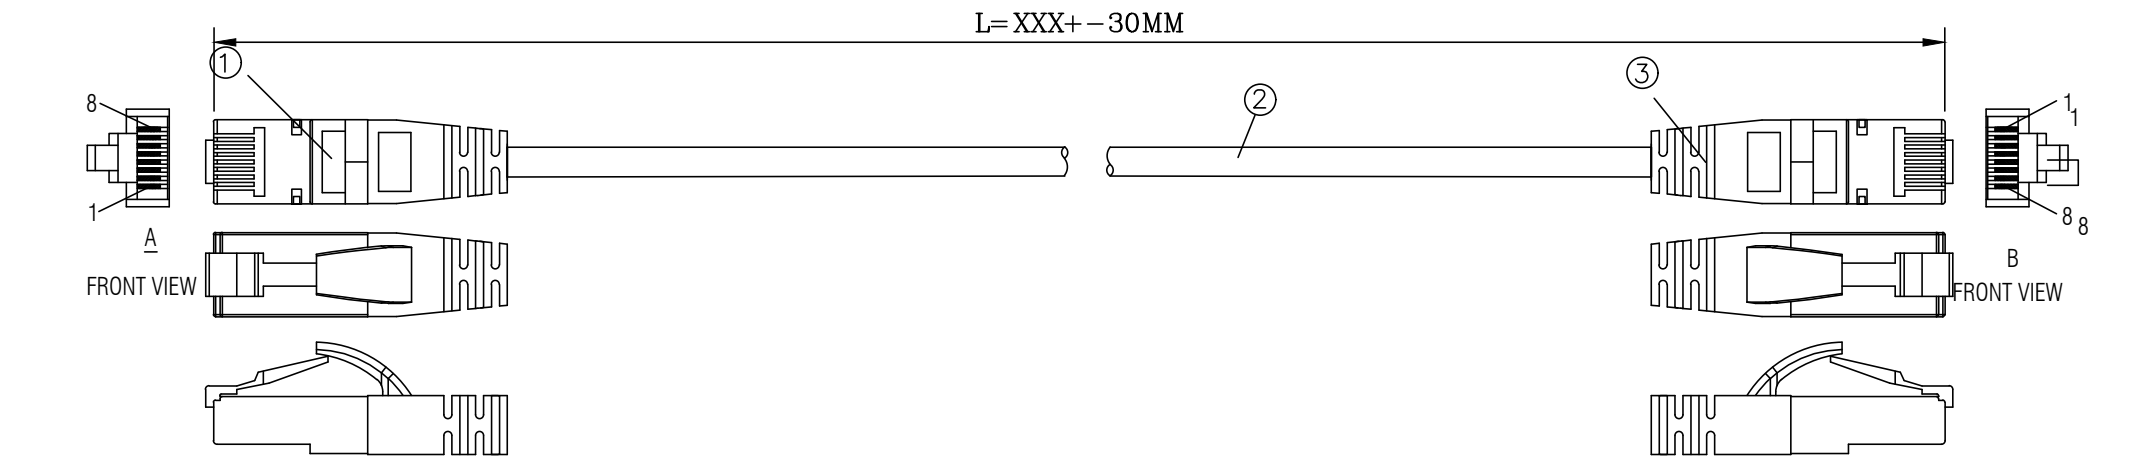

Note:

2.CONDUCTOR RESISTANCE : 2~10 OHMS MAX. INSULATOR RESISTANCE: 5M OHMS MIN.
3.HI-POT: DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD(INCLUDE ALL PACKING OR OTHER MATERIAL).
5.PRINT WORD: Customizable
6.PACKING:blank PE bag (Customizable)
7.Quality test:PASS FLUKE CAT6 CHANNEL TEST

			NO.	SPECIFICATION STANDARD	QTY
			①	RJ45 UNSHIELDED CONNECTOR, LONG TYPE, PIN GOLD PLATED Fu".	2pcs
1.0	DRAWING ISSUE	2025.11.20	②	CAT6 UTP CABLE 24AWG (7/0.18BC)*4P, OD: Ø6.0MM, PVC JACKET COLOR: GRAY/BLUE	1pcs
REV	DESCRIPTION	DATE	③	60P PVC	0.6g

DESCRIPTION:		CAT6 -UTP-24AWG-XXM			NO.
P/N ON.		CAT6 network cable			PAGE: 1 OF 1
DRAWN BY:		Mark	UNIT:	mm	SCALE: NONE
CHECKED BY:		Chris	DATE:	2025.11.20	TOLER: ±0.20
APPVL BY:		ZHL			REV: 1.0