

HZL-T5811



HZL-T5813

Wall-Mount Network Cabinet (Single Section)


Feature:

- 19" standard installation welded frame, reliable structure.
- Assembled frame structure, easy handling, to maximize save shipping cost.
- Standing or wall mounting installation, adjustable feet and castor are optional.
- Easy mounting installation (patent).
- Removable side panels, side locks optional.
- Knock out hole for entering cable on both of top cover and bottom panel.
- Toughened glass front door, turning angle is over 180 degrees.


Physical Characteristics (Overall)

Bolein wall mount network cabinet (single section)	
Main Material	SPCC cold rolled steel
Thickness	Mounting profile 1.5mm, mounting angle 1.2mm
Surface Finish	Degreasing, pickling, phosphoric, powder coated
Degree of Protection	IP20
Loading Capacity	Static loading: 60KG
Color	Black RAL9004, Grey RAL7035

Product Details



Main Structure

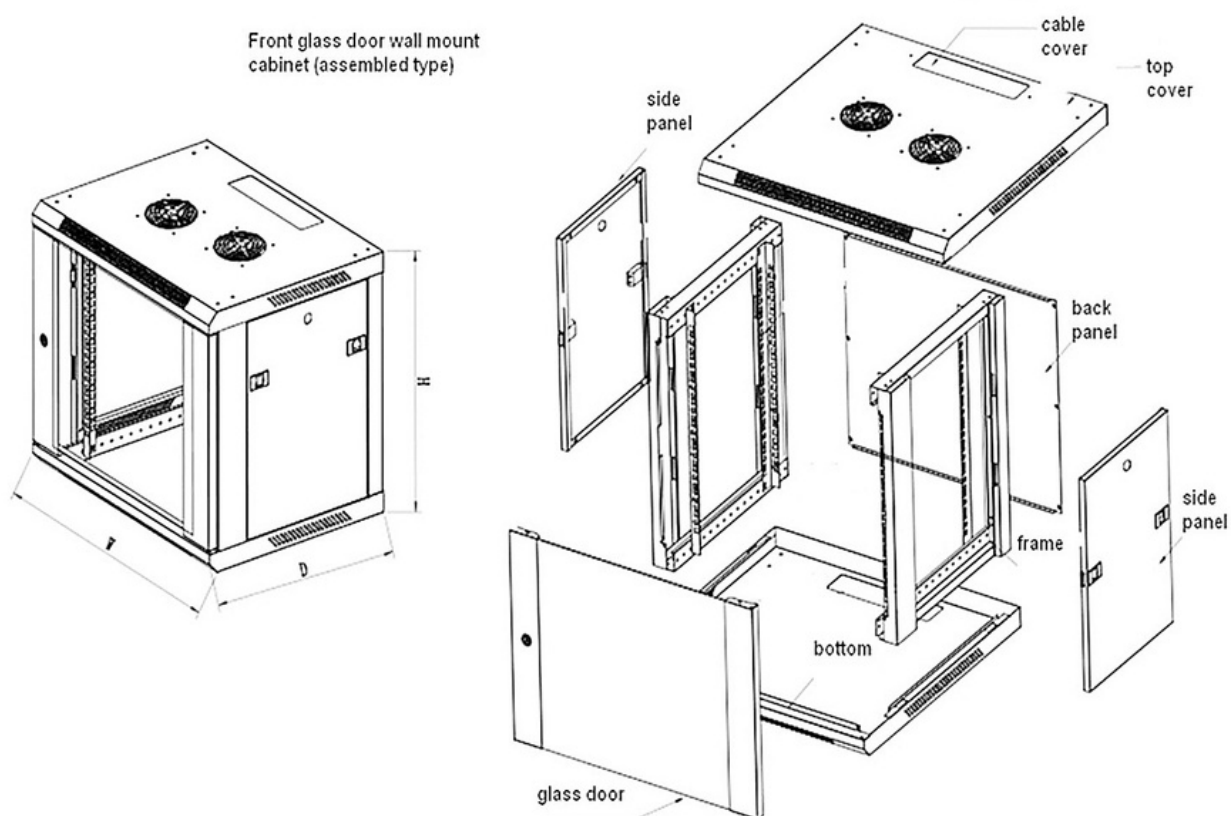

Main Parts

S/N	Specification	Quantity	Unit	Material	Surface finish	Remark
1	Frame	2	Piece	SPCC Cold rolled steel 1.2	Powdercoated	—
2	Side panel	2	Piece	SPCC Cold rolled steel 1.0	Powdercoated	—
3	Back panel	1	Piece	SPCC Cold rolled steel 1.0	Powdercoated	—
4	Bottom panel	1	Piece	SPCC Cold rolled steel 1.0	Powdercoated	—
5	Top cover	1	Piece	SPCC Cold rolled steel 1.0	Powdercoated	—
6	Front glass door	1	Piece	5MM Toughened glass	—	—
7	Mounting profile	4	Piece	SPCC Cold rolled steel 1.5	Powder coated	—
8	Cable cover	2	Piece	SPCC Cold rolled steel 1.0	Powder coated	—
9	Round lock	1	Piece	—	—	Side locks optional
10	M6 screw	12/20	Set	—	—	20pcs for 15U & 18U
11	Allen wrench	1	Piece	—	—	—

Dimension

Part NO.	Capacity(U)	Width(mm)	Depth(mm)	Height(mm)
HZL-T5811	4U	600	450	280
HZL-T5812	6U		450	370
HZL-T5813	9U		450	500
HZL-T5814			600	
HZL-T5815	12U		600	635
HZL-T5816	18U		450	800
HZL-T5817			600	1000
HZL-T5818	22U		450	1000
			600	