

12U Wall-Mount Single-Section Network Cabinet

Models T5017 & T5815



Product Overview

HezzraLink 12U wall-mount cabinets provide a secure and organized 19-inch enclosure for network and telecommunications equipment. The single-section design is suitable for structured cabling, switches, routers, patch panels, DVR/NVR equipment and other rack-mounted devices.

Rack Height	12U
Rack Standard	19"
Protection	IP20
Static Load	60 kg

Available 12U Sizes

SKU	Cabinet Size	Configuration
T5017	600 x 450 x 635 mm (W x D x H)	12U / Wall Mount / Single Section
T5815	600 x 600 mm (W x D)	12U / Wall Mount / Single Section

Key Features

- 19-inch standard installation frame for rack-mounted network equipment.
- 12U capacity for switches, patch panels, routers, DVR/NVR and structured cabling equipment.
- Single-section assembled steel structure with removable side panels.
- 5 mm toughened glass front door with lock and opening angle over 180 degrees.
- Top and bottom knock-out cable entry openings for flexible cable routing.
- Two top fan mounting positions for active ventilation; fans are not included.
- Wall-mount installation; adjustable feet and casters are optional.
- Side locks are optional.


Typical Applications

Small offices | Telecom closets | Structured cabling | Network switches | Patch panels | Routers | DVR/NVR | Fiber equipment

Technical Specifications

Specification	Details
Cabinet Type	Wall-mount, single-section network cabinet
Rack Capacity	12U
Rack Standard	19-inch
Main Material	SPCC cold rolled steel
Frame / Mounting Angle	SPCC cold rolled steel, 1.2 mm
Mounting Profile	SPCC cold rolled steel, 1.5 mm
Side / Back / Top / Bottom Panels	SPCC cold rolled steel, 1.0 mm
Surface Finish	Degreasing, pickling, phosphoric treatment, powder coated
Degree of Protection	IP20
Loading Capacity	Static loading: 60 kg
Front Door	5 mm toughened glass with lock
Door Opening Angle	Over 180 degrees
Side Panels	Removable; side locks optional
Cable Entry	Knock-out openings on top cover and bottom panel
Cooling Provision	2 top fan mounting positions; fans not included
Color	Black RAL9004; Grey RAL7035

Main Structure

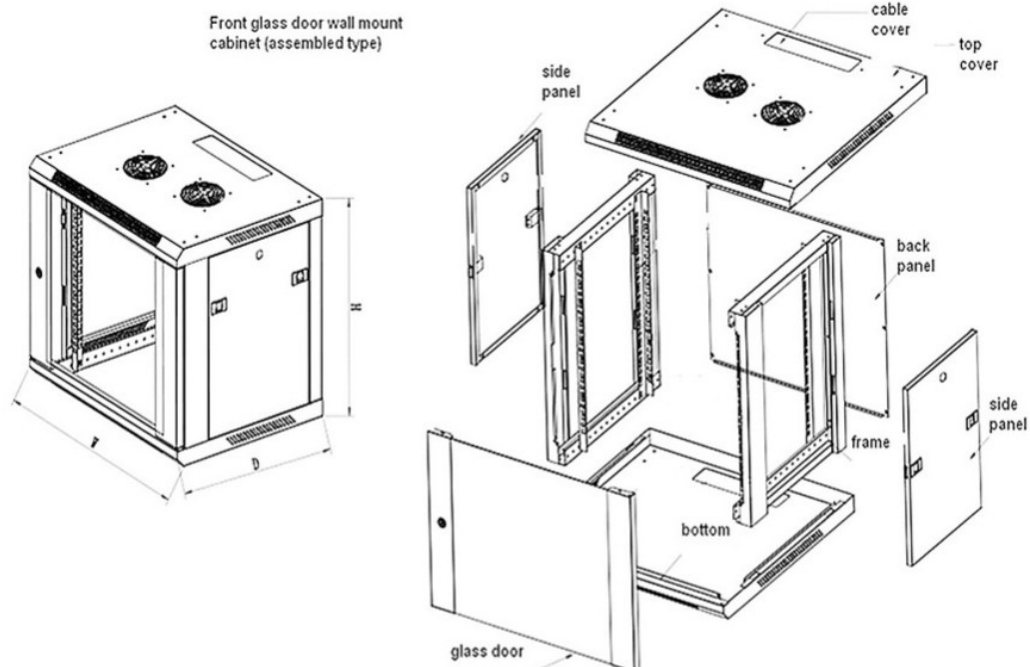

Construction & Main Parts

Part	Qty.	Material	Finish
Frame	2	SPCC cold rolled steel 1.2 mm	Powder coated
Side panel	2	SPCC cold rolled steel 1.0 mm	Powder coated
Back panel	1	SPCC cold rolled steel 1.0 mm	Powder coated
Bottom panel	1	SPCC cold rolled steel 1.0 mm	Powder coated
Top cover	1	SPCC cold rolled steel 1.0 mm	Powder coated
Front glass door	1	5 mm toughened glass	-
Mounting profile	4	SPCC cold rolled steel 1.5 mm	Powder coated
Cable cover	2	SPCC cold rolled steel 1.0 mm	Powder coated
Round lock	1	-	-
Mounting hardware	Per cabinet configuration	M6 hardware	-
Allen wrench	1	-	-

Product Details



Ordering Information

SKU	Rack Size	Depth Option
T5017	12U	450 mm
T5815	12U	600 mm

Note: Fans are not supplied with the cabinet. Side locks, adjustable feet and casters are optional. The T5815 overall height was not included in the supplied product information and is therefore not stated in this datasheet.